BALDOR • RELIANCE

Customer information packet

CEM3550

1.5HP, 3500RPM, 3PH, 60HZ, 3520M, N
MDS OF MICHIGAN INC
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
9/20/2024 2:13:10 PM

Specifications

Enclosure	TEFC
Frame	56C
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	1.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
	460.0 V @ 60 HZ
Agency Approvals	CSA EEV
	NEMA PREMIUM
	NEMA_PREMIUM
	UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	4.000 A @ 208.0 V
	3.800 A @ 230.0 V
	1.900 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	84.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard

Part detail

Revision	V
Type	AC
Mech. spec.	35T942
Base	
Status	PRD/A
Elec. spec.	35WGM760
Layout	35LYT942
Eff. date	04-30-2024
CD Diagram	CD0005
Poles	02
Leads	9#18
Proprietary	False
Created date	05-21-2010

Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	1.9 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3520M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	12.22 IN
Power Factor	85
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3500 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3441LUA									
CAT.NO.	CEM3550								
SPEC	35T942M760G1								
HP	1.5								
VOLTS	230/460								
AMPS	3.8/1.9								
RPM	3500								
FRAME	56C	**HZ**	60	**PH**	3				
SF	1.15	**CODE**	L	**DES**	B	**CLASS**	F		
NEMA NOM. EFF	84	**PF**	85						
RATING	40C AMB-CONT								
CC	010A								
ENCL	TEFC	**SER**							
DE	6205	**ODE**	6203						
VPWM INVERTER READY									
CT6-60H(10:1)VT3-60H(20:1									
	50Hz 1.5HP 190/380V 4.6/2.3A								SF1.0

Parts list

Part number	Description	Quantity
SA196995	SA 35T942M760G1	1.000 ea
RA184434	RA 35T942M760G1	1.000 ea
34FN3002B01	EXTERNAL FAN, PLASTIC, .637/.639 HUB W/	1.000 ea
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 ea
35CB3007	35 CB CASTING W/.88 DIA. LEAD HOLE	1.000 ea
36GS1000SP	GASKET-CONDUIT BOX, .06 THICK #SV-330 LE	1.000 ea
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
35EP3122K00	MASTER ODE,203 BRG,.683SH,#26 DRN,FH MTG	1.000 ea
HW5100A03	WAVY WASHER (W1543-017)	1.000 ea
35EP3307F00	MASTER DE,205 BRG,.998SH,#26 DRN	1.000 ea
51XN1032A20	10-32 X 1 1/4 HX WS SL SR	2.000 ea
35FH4005A32SP	IEC FH NO GRSR W/3 HOLES - PRIMED	1.000 ea
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 ea
35CB4521GX	CONDUIT BOX LID KIT **ORDER INDIV PARTS	1.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 ea
HW2501D13	KEY, 3/16 SQ X 1.375	1.000 ea
HA7000A04	KEY RETAINER 0.625 DIA SHAFTS	1.000 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
MG1050Y01	CELEROL BALDOR GOLD *** NLA IN SINGLE GA	0.017 ga
51XB1214A16	12-14X1.00 HXWSSLD SERTYB	1.000 ea
HA3100A12	THRUBOLT 10-32 X 7.375	4.000 ea
LC0005E01	CONN.DIA./WARNING LABEL (LC0005/LB1119N)	1.000 ea
NP3441LUA	AL SUPER-E VPWM INV RDY,UL EEV,NEMA PREM	1.000 ea
35PA1066	PKG GRP, PRINT PK1008A06	1.000 ea
FE-0000001	ZRTG FE ASSEMBLY	1.000 ea
PE-0000001	ZRTG PE ASSEMBLY	1.000 ea


AC Induction Motor Performance Data
Record # 61761
Typical performance - not guaranteed values


Winding: 35WGM760-R069	**Type:** 3520M	**Enclosure:** TEFC

Nameplate Data			**460 V, 60 Hz: High Voltage Connection**	
Rated Output (HP)		1.5	**Full Load Torque**	2.22 LB-FT
Volts		230/460	**Start Configuration**	direct on line
Full Load Amps		3.8/1.9	**Breakdown Torque**	9.49 LB-FT
R.P.M.		3500	**Pull-up Torque**	3.61 LB-FT
Hz	60 **Phase**	3	**Locked-rotor Torque**	7.35 LB-FT
NEMA Design Code	B **KVA Code**	L	**Starting Current**	17.9 A
Service Factor (S.F.)		1.15	**No-load Current**	0.932 A
NEMA Nom. Eff.	84 **Power Factor**	85	**Line-line Res. @ 25ºC**	12.2 Ω
Rating - Duty		40C AMB-CONT	**Temp. Rise @ Rated Load**	43°C
S.F. Amps			**Temp. Rise @ S.F. Load**	50°C
			Locked-rotor Power Factor	60.1
			Rotor inertia	0.0553 LB-FT2


Load Characteristics 460 V, 60 Hz, 1.5 HP


% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	45	67	79	85	89	90	87
Efficiency	72.3	82.2	84.4	84.8	84.3	82.8	84.5
Speed	3575	3551	3526	3498	3466	3433	3479
Line amperes	1.03	1.25	1.55	1.91	2.31	2.79	2.15

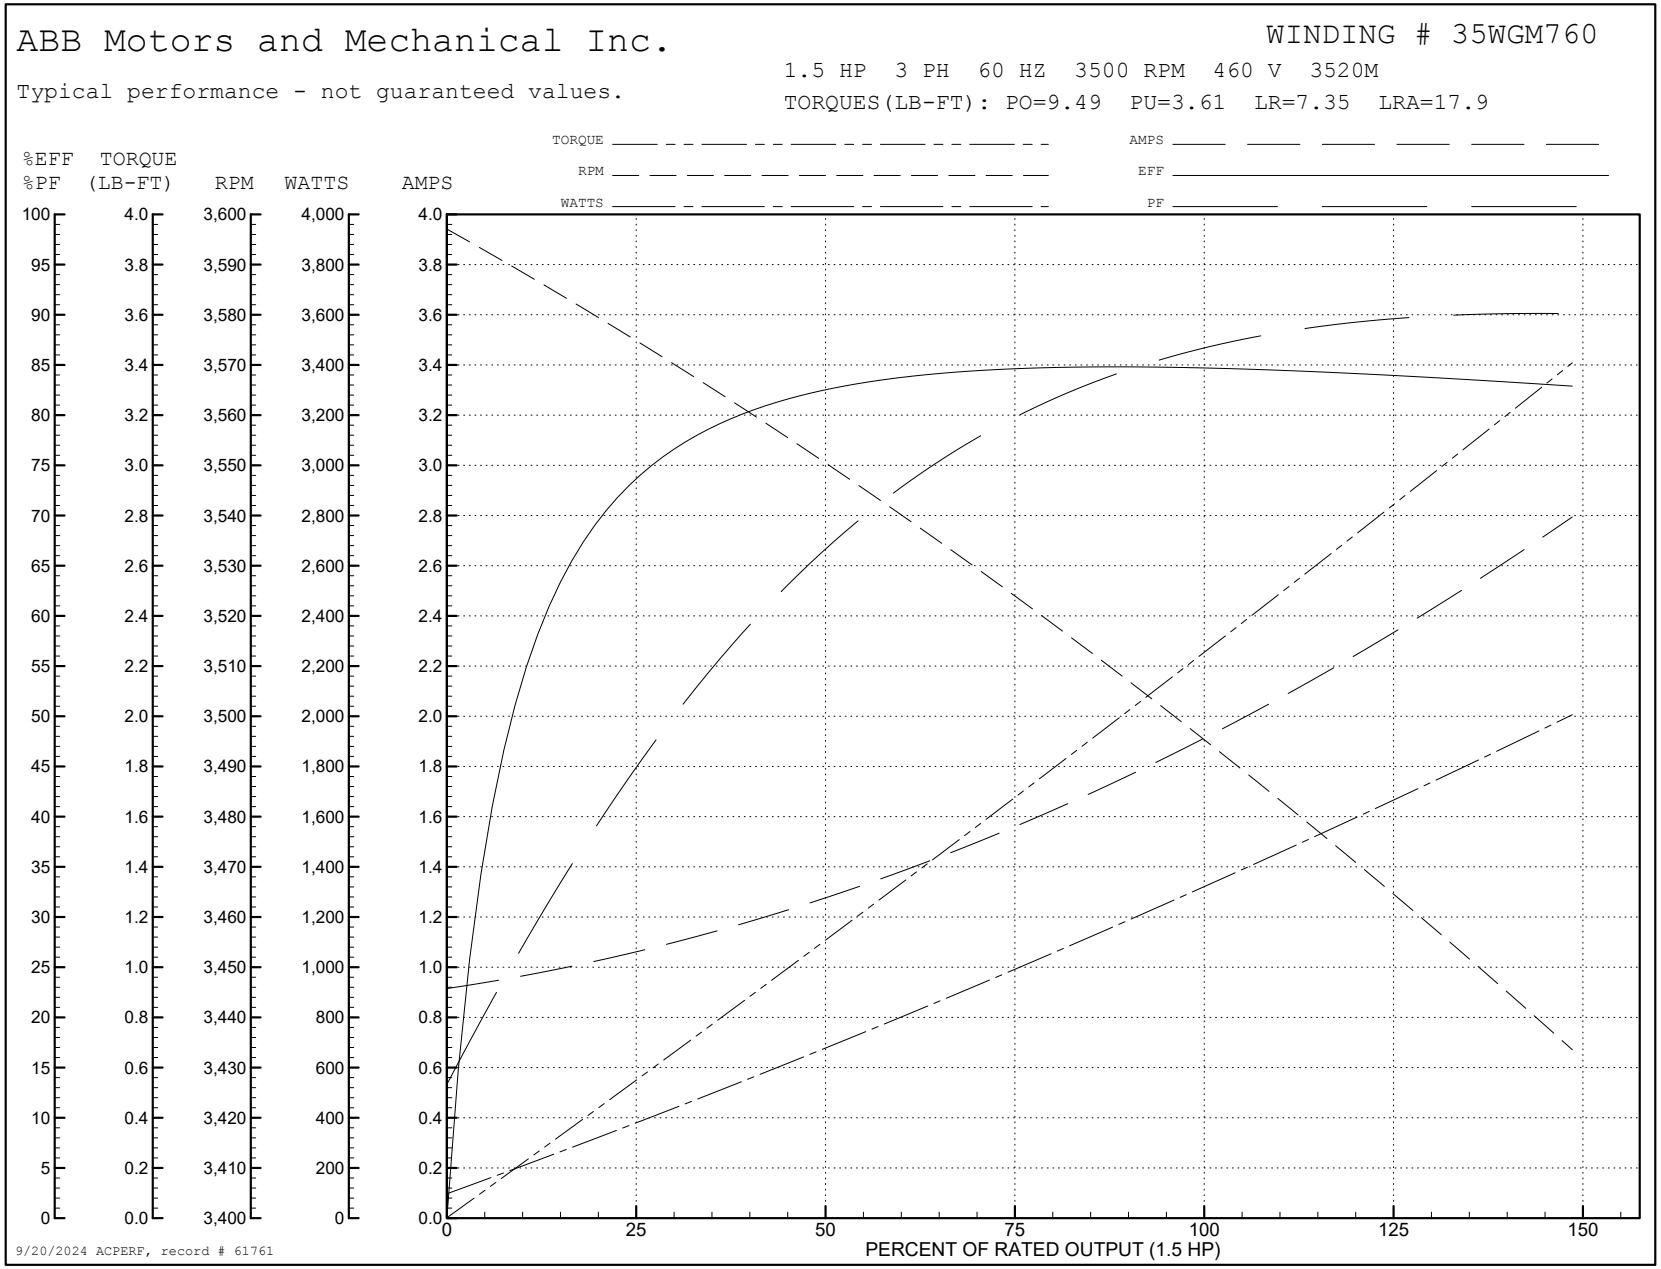
ABB Motors and Mechanical Inc.
WINDING # 35WGM760
1.5 HP 3 PH 60 HZ 3500 RPM 460 V 3520M
Typical performance - not guaranteed values.
TORQUES(LB-FT): PO=9.49 PU=3.61 LR=7.35 LRA=17.9
TORQUE
RPM
WATTS
AMPS
EFF
PF
%EFF
%PF
TORQUE (LB-FT)
RPM
WATTS
AMPS
PERCENT OF RATED OUTPUT (1.5 HP)
9/20/2024 ACPERF, record # 61761

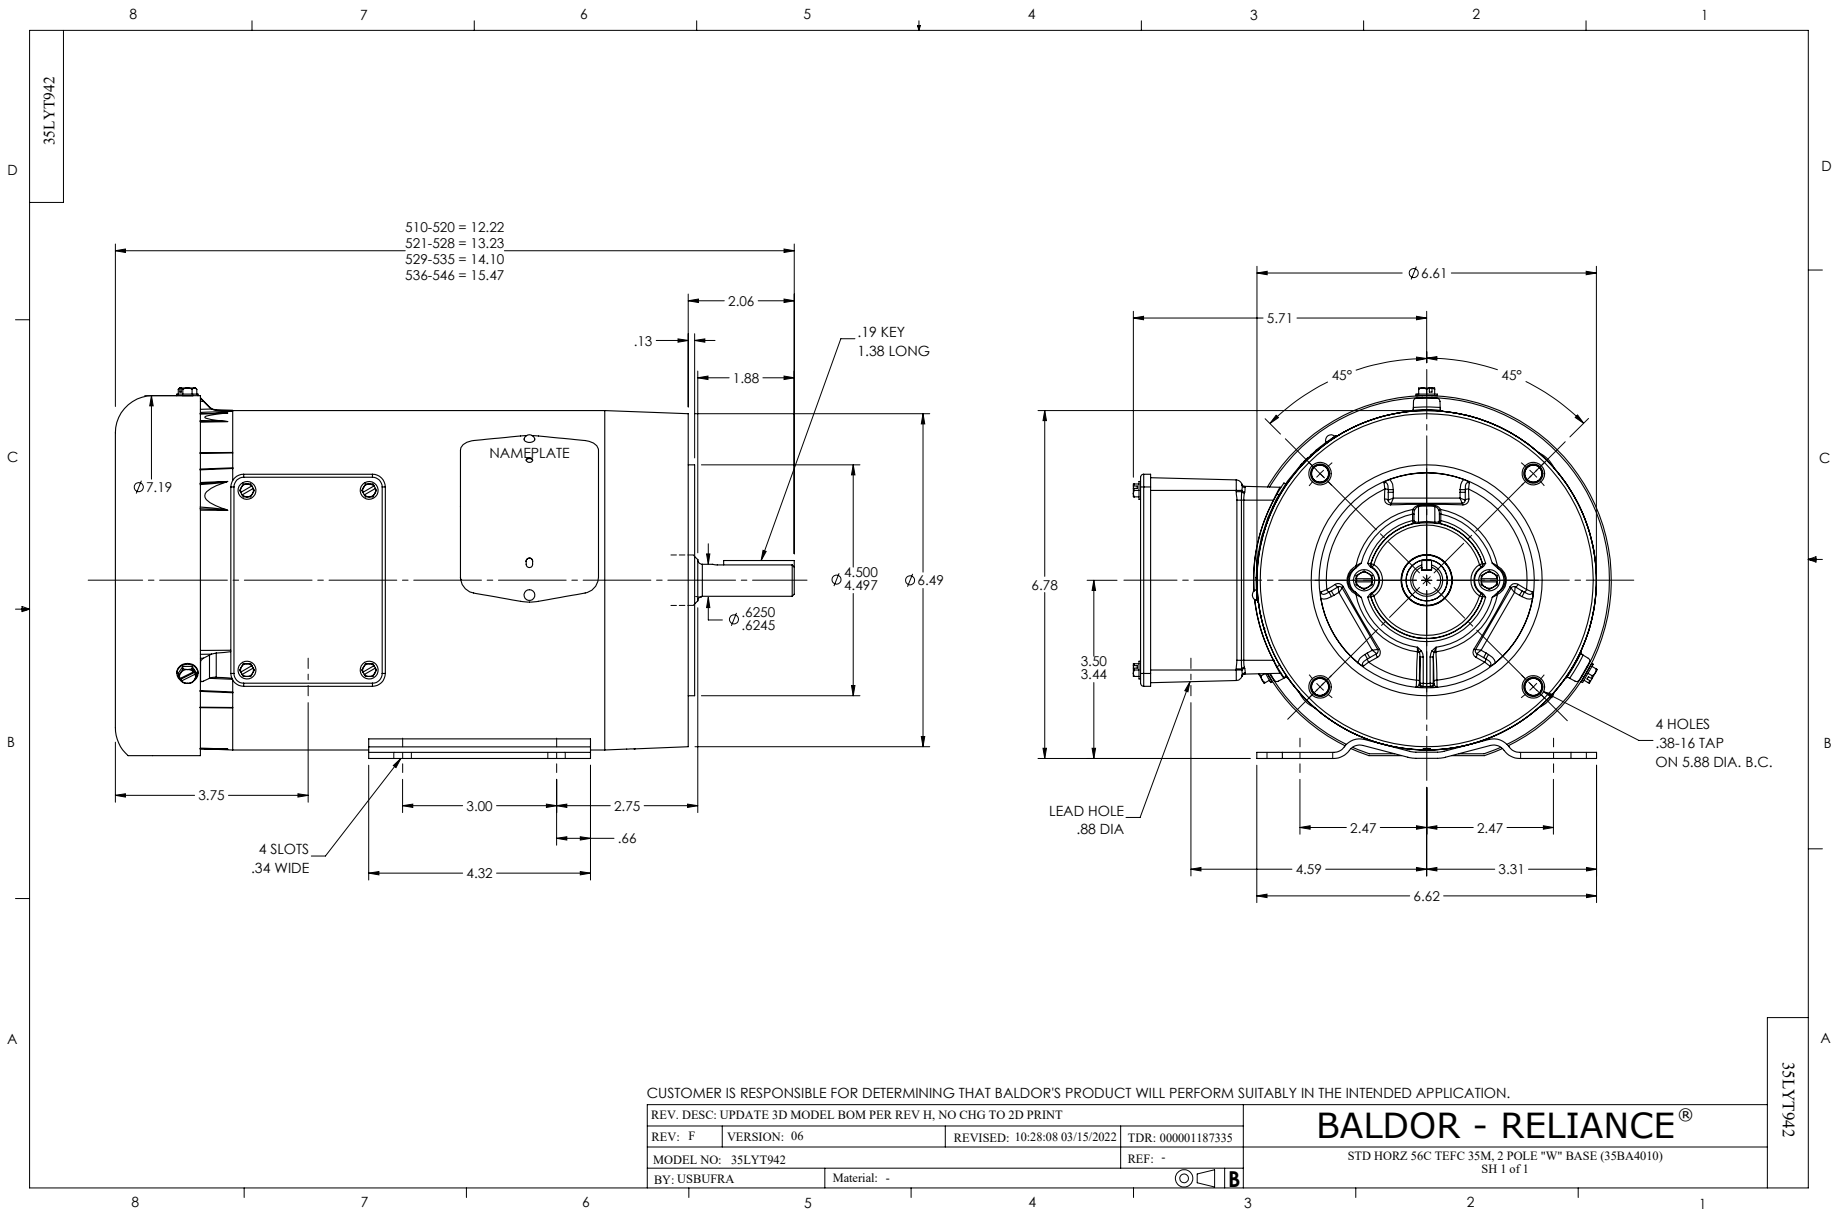
35LYT942
510-520 = 12.22
521-528 = 13.23
529-535 = 14.10
536-546 = 15.47
2.06
.13
.19 KEY
1.38 LONG
1.88
NAMEPLATE
Ø7.19
Ø 4.500
4.497
Ø6.49
Ø .6250
.6245
3.75
3.00
2.75
.66
4.32
4 SLOTS
.34 WIDE
Ø6.61
5.71
45°
45°
6.78
3.50
3.44
4 HOLES
.38-16 TAP
ON 5.88 DIA. B.C.
LEAD HOLE
.88 DIA
2.47
2.47
4.59
3.31
6.62
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.
REV. DESC: UPDATE 3D MODEL BOM PER REV H, NO CHG TO 2D PRINT
REV: F
VERSION: 06
REVISED: 10:28:08 03/15/2022
TDR: 000001187335
MODEL NO: 35LYT942
REF: -
BY: USBUFRA
Material: -
B
BALDOR - RELIANCE®
STD HORZ 56C TEFC 35M, 2 POLE "W" BASE (35BA4010)
SH 1 of 1
35LYT942

CD0005

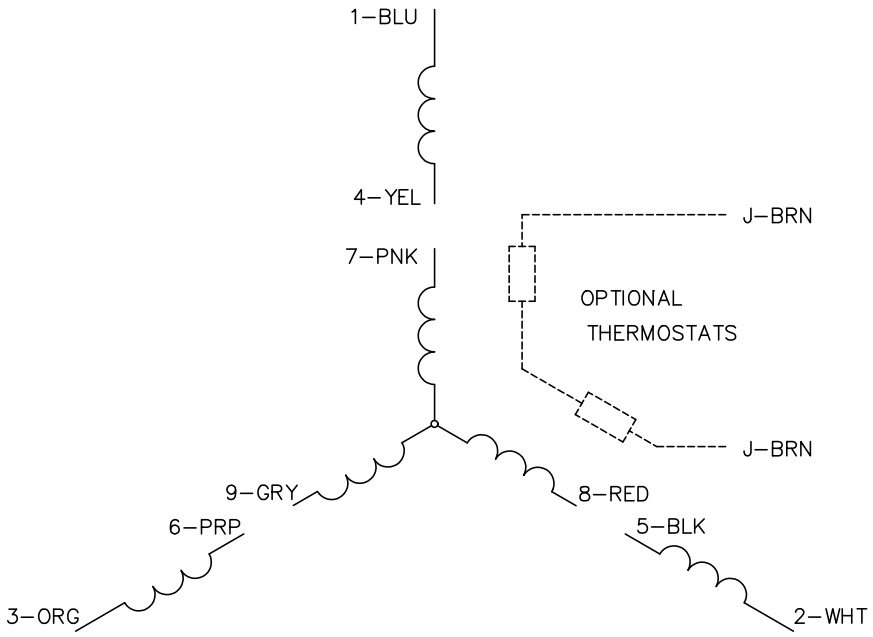

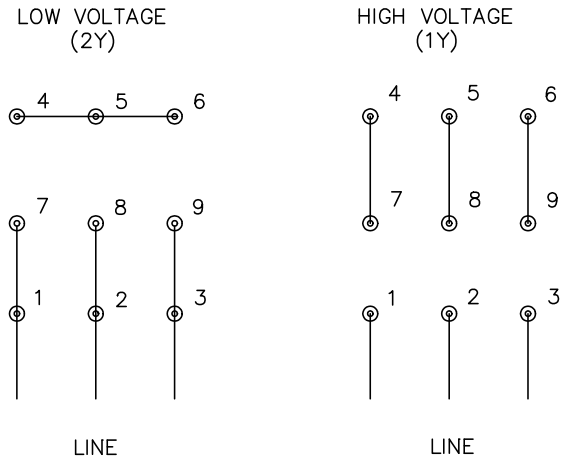

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
CD0005		FILE: AAA00005140	MDL: –
		MTL: –	3PH, DV, 9 LEADS